

UNIC **URW-706-2** CRANE



LOAD CHART

FIRST STAGE EXTENDED

		4.8M BOOM LENGTH					
		m	up to 2.7	3.0	3.5	4.0	4.3
Outrigger	Max-extended	kg	6,000	6,000	5,450	4,850	3,950
	Mid-extended	kg	6,000	6,000	5,450	4,850	3,950
	Mid-extended	kg	6,000	6,000	3,450	4,550	3,750

SECOND STAGE EXTENDED

		4.8 – 7.7M BOOM LENGTH								
Working radius	m	up to 2.0	3.0	3.5	4.0	5.0	6.0	7.0	7.2	
Outrigger	Max-extended	kg	6,000	6,000	5,350	4,750	3,750	2,950	2,250	2,000
	Max-extended	kg	6,000	6,000	5,350	4,750	3,750	2,450	1,700	1,550
	Min-extended	kg	6,000	6,000	5,350	4,650	2,550	1,650	1,150	1,050

THIRD STAGE EXTENDED

		7.7 – 10.6M BOOM LENGTH								
Working radius	m	up to 2.7	4.0	5.0	6.0	7.0	8.0	9.0	10.0	10.1
Outrigger	Max-extended	kg	4,550	4,550	3,650	2,950	2,400	1,800	1,350	950
	Max-extended	kg	4,550	4,550	3,650	2,550	1,750	1,300	950	700
	Min-extended	kg	4,550	4,550	2,650	1,700	1,200	850	650	450

FOURTH STAGE EXTENDED

		10.6 – 13.5M BOOM LENGTH									
Working radius	m	up to 5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	12.9	
Outrigger	Max-extended	kg	2,950	2,550	2,150	1,850	1,500	1,200	950	800	450
	Max-extended	kg	2,950	2,550	1,850	1,400	1,100	850	650	550	400
	Min-extended	kg	2,750	1,850	1,300	1,000	750	550	430	330	240



FIFTH STAGE EXTENDED

		13.5 – 16.3M BOOM LENGTH									
Working radius	m	up to 5.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0	15.0	15.8
Outrigger	Max-extended	kg	2,350	1,700	1,400	1,200	1,000	850	700	600	500
	Max-extended	kg	2,350	1,500	1,150	950	750	600	500	400	300
	Min-extended	kg	1,950	1,050	800	650	500	400	300	230	170


SIXTH STAGE EXTENDED

		16.3 – 19.2M BOOM LENGTH							
Working radius		m	up to 8.0	10.0	12.0	14.0	16.0	18.0	18.6
Outrigger	Max-extended	kg	1,350	1,000	800	600	400	250	200
	Max-extended	kg	1,350	1,000	650	450	300	200	150
	Min-extended	kg	1,100	700	450	280	170	90	60

DIMENSIONS

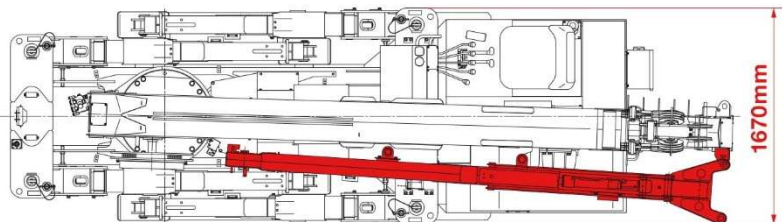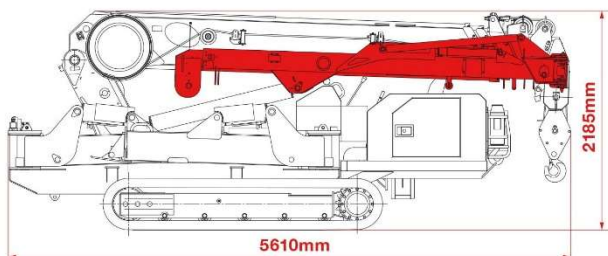

RATED LOADS & OUTRIGGER POSITIONS

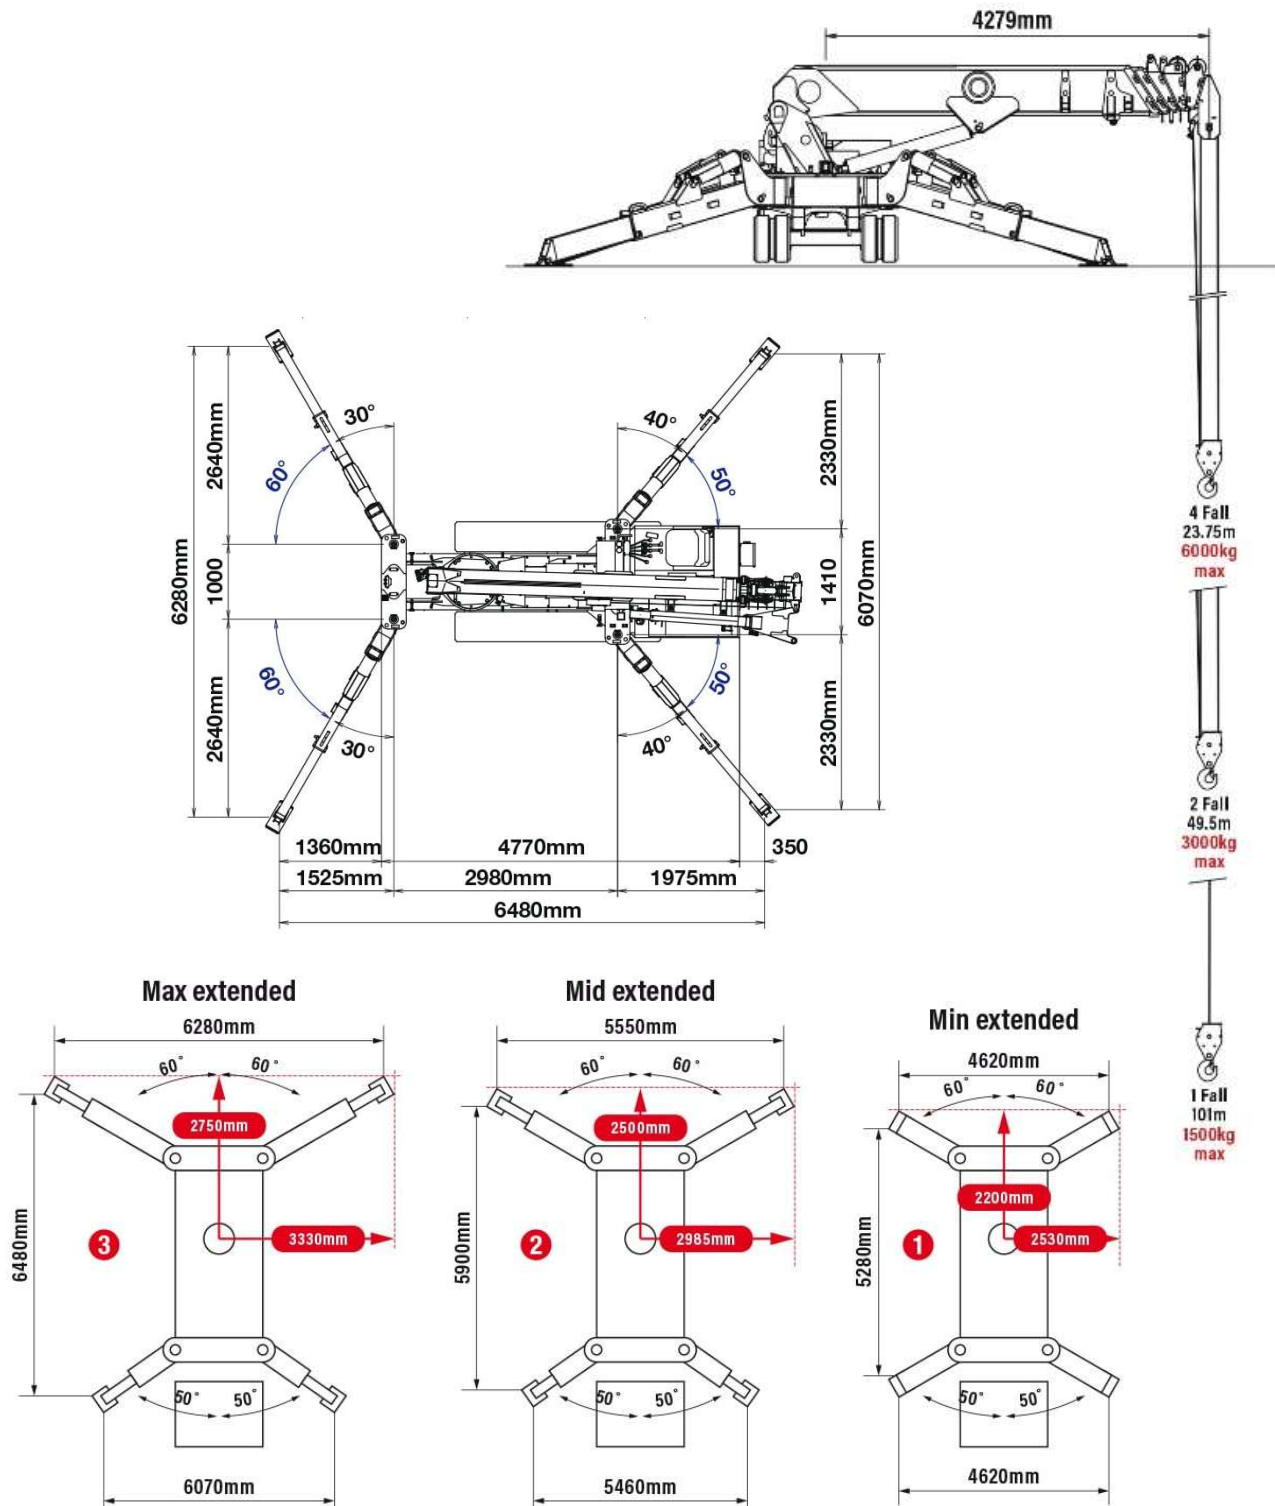




MINICRANESNZ

022 315 6074

MINI & SPIDER CRANES
FOR HIRE

WORKING RANGE

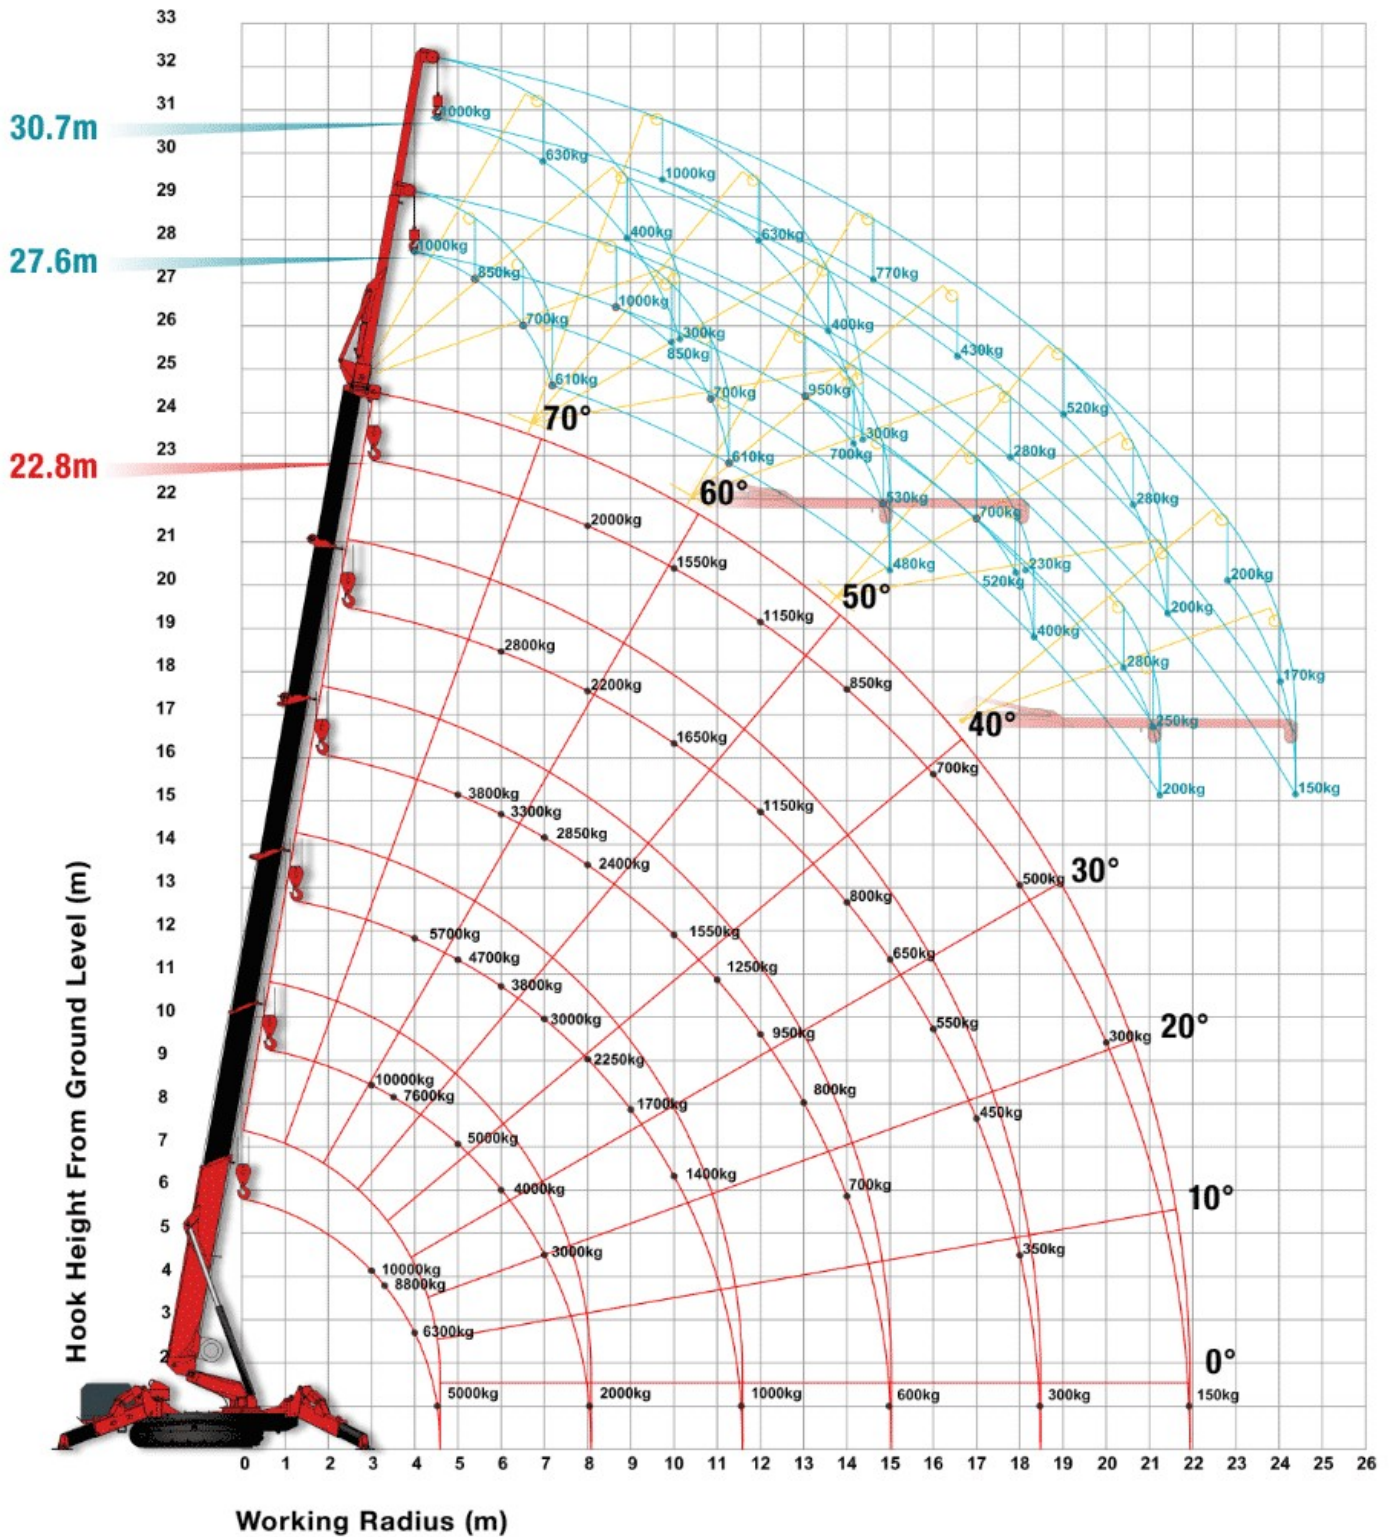

022 315 6074

admin@minicranesnz.co.nz

www.minicranesnz.co.nz

We have the
RIGHT CRANE
for your Job



MINICRANESNZ

022 315 6074
MINI & SPIDER CRANES
FOR HIRE

SPECIFICATIONS

Crane capacity	capacity:	6.0t x 3.0m
Max working radius	max:	18.6m
Max lifting height	approx:	19.5m (25.2m with hydraulic fly jib, 25.9m with fixed hook)
Rope length	max:	23.75m (4 fall), 49.5m (2 fall), 101m (1 fall)
Dimensions	folded:	5610mm (l) x 1670mm (w) x 2185mm (h)
Weight	unladen:	8,080kg + 480kg hydraulic fly jib
Point loadings	Due to the many variables involved, point loadings are only available on request	
Hook speed	approx:	11m/min (with 5 layers and 4 falls)
Telescopic system	boom length:	4.80 - 19.20m
	telescoping speed:	14.4m/52 seconds
	boom type:	6 section hydraulically telescoping boom, hexagonal box construction
Derricking angle/speed	approx:	0 - 80°/16.0 seconds
Slewing angle/speed	approx:	360° (continuous) 2.5min rpm
Traction system	drive:	hydrostatic 2-speed, stepless forward and reverse
	travel speed:	0 - 2.9km/h
	gradeability:	± 20° (vertical) 20° (traverse)
	track ground length:	2240mm
	track ground pressure:	43.6kPa (0.44kg/cm ²)
	track width:	400mm
Engine	manufacturer:	Mitsubishi
	fuel:	diesel (electric dual power option)
	maximum output:	23.5kW (32.0PS) / 2500min rpm
	starting method:	electric
	tank capacity:	74 litres
Electric motor	power:	7.5kW
	voltage:	400v AC 50/60hz
Standard equipment	computer controlled moment limiter (safe load indicator), radio remote control, overwinding alarm, computer controlled intelligent voice warning system, multi-function operation by radio remote control, intelligent throttle activation, automatic hook stow, overload warning alarms, overload warning lamps, working area limitation, 4 fall/2fall/single fall, dual diesel/electric powered, 800kg hydraulic luffing fly jib	



022 315 6074
admin@minicranesnz.co.nz
www.minicranesnz.co.nz

We have the
RIGHT CRANE
for your Job